


SVEZA FILM FACED BIRCH PLYWOOD

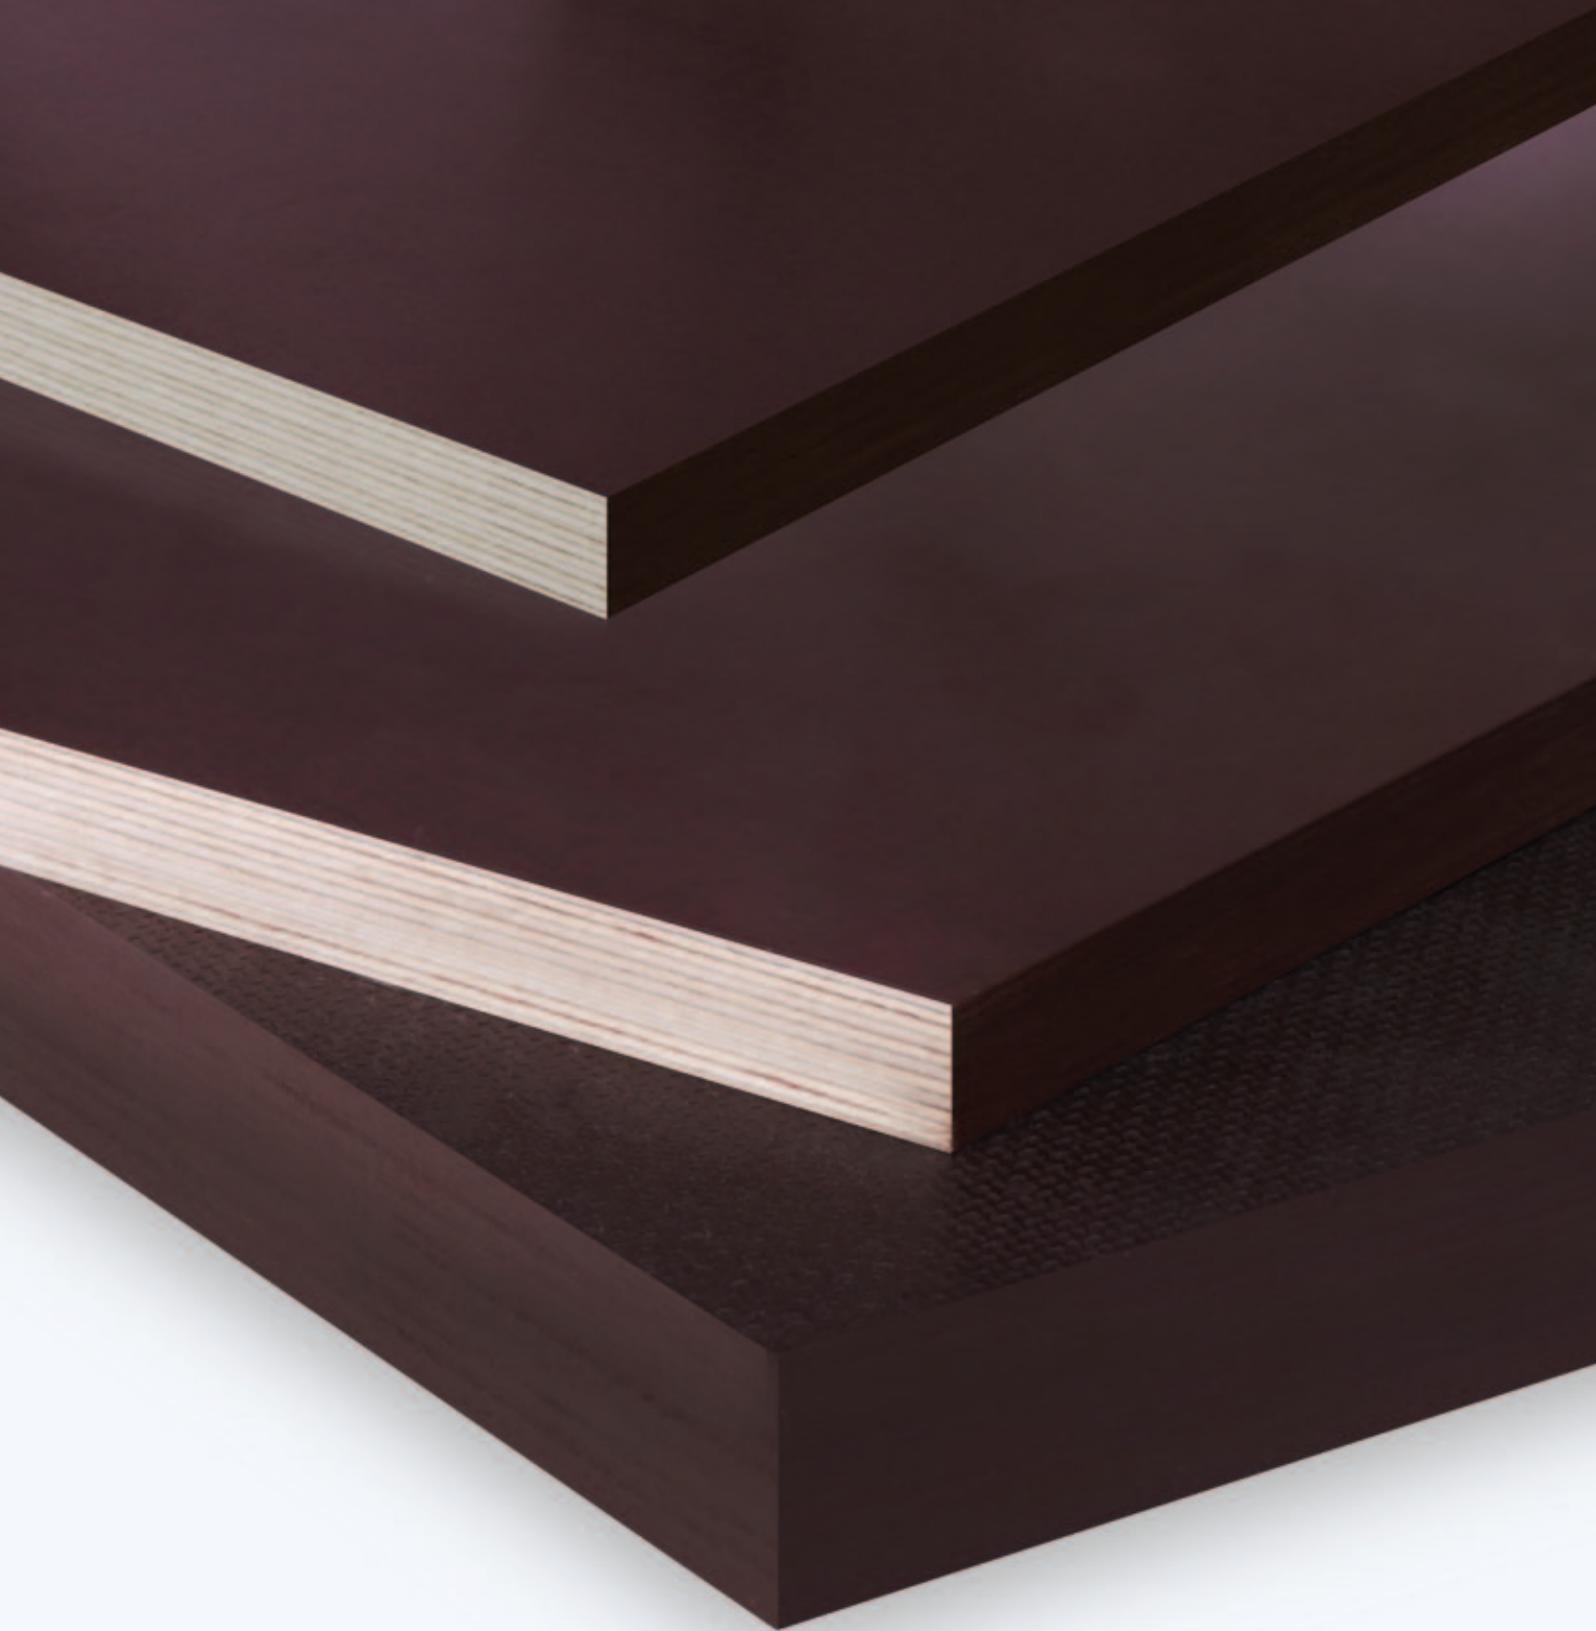

SVEZA FILM FACED BIRCH PLYWOOD

SVEZA Film Faced Birch Plywood is a high-quality exterior birch plywood with special coating of resin-treated paper that turns into protective film during production. Comes with smooth or mesh surface. Edges are sealed with water-dispersible acrylic paint. This type of plywood is widely used in the construction industry and vehicle production. It is easy to mount and work with.

Key benefits

- **Highly wear resistant**
- **Resistant to most aggressive environments, including chemicals**
- **Higher water resistance**
- **Slip resistant (meshy surface)**
- **Durable**
- **Hard surface**
- **Resistance to temperature variation: through a range of -40°C to +50°C (-40°F to +122°F)**
- **Comes in a variety of thicknesses and sizes**

Technical specifications

Standard sizes, length x width, mm (ft)	1220x2440x1220 (4x8x4) 1250x2500x1250 (4x8x4) 1500/1525x2440/2500 (5x8) 2440/2500x1500/1525 (8x5) 1500/1525x3000/3050 (5x10)
Thickness, mm	6-40
Surface type	Smooth/smooth (F/F), smooth/wire mesh (F/W)
Formaldehyde emission class	E1
Waterproofness	Higher
Density, kg/m ³	640-700
Moisture content, %	5-14
Edge sealing	Emulsion acrylic paint
Produced under STO 00255177-002-2014 "Film-faced birch plywood."*	

Strength specifications

Subject		Thickness, mm	Index
Static bending strength, N/mm ² , not less	along the outer layer grain	9-40	60
	across the outer layer grain		30
Strength in tension along the grain, N/mm ² , not less		6-8	30
Modulus of elasticity in static bending, N/mm ² , not less	along the grain	9-40	6000
	across the grain		3000

* For STO 00255177-002-2014, visit "Certificates" section of www.sveza.com website.

Proudly Distributed By



• **US: 888-826-5528**
• **CAN: 844-365-6995**
• **hardwoods-inc.com**